



**ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.**

**Factory site:** 666 Xiangfu Road,  
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



Download "Hangcha  
Forklift" App



ISO14001  
ISO14001:2015



ISO9001  
ISO9001:2015



HANGCHA trucks conform  
to the European Safety  
Requirements.

2022 VERSION 1/COPYRIGHT 2022/12

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



## A Series Pallet Truck With High Lift

with capacities of 2,000kg

*The World of Hangcha*



# LET THE LITHIUM POWER BE REEL



HANGCHA provides Li-Ion battery (LiFePO4) with 5 years or 10000 hours warranty.




**5 YEARS WARRANTY**

## INNOVATIVE SOLUTIONS NEW POWER NOW

Innovative, reliable lithium-ion technology (Lithium Iron-Phosphate), which are developed jointly by HANGCHA and CATL. Battery cells and modules are from CATL, with reliable quality, exclusively for HANGCHA.

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
- / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 °C or above.
- / Adapted to low temperatures: Comes standard with an electrical heating feature, ensuring normal operation in low temperatures.
- / Quick charging: 2 hours full charge, economic use of each break.
- / Long-working: 4000 charging cycles, capacity retention greater than 80%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

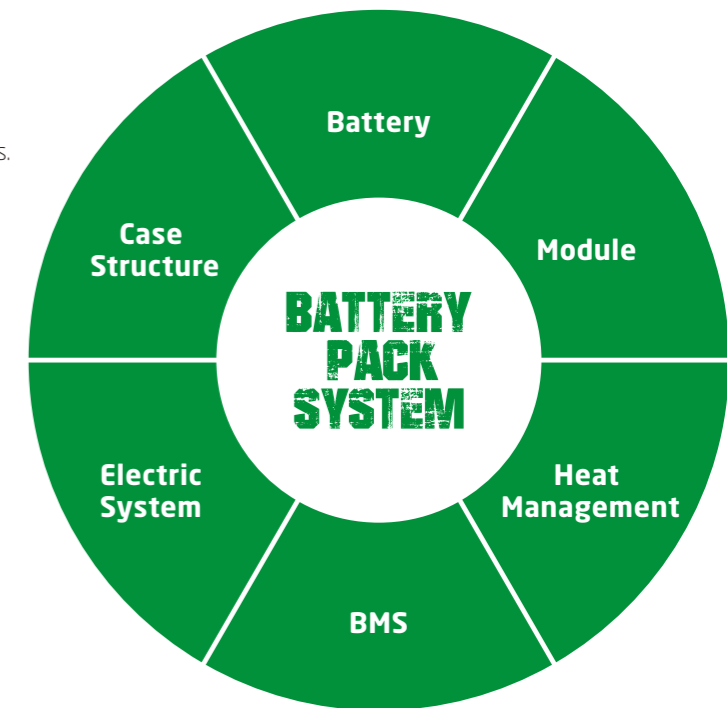

Li-Ion  
**2 hours**  
**100%**

Lead-acid batteries  
**8-10 hours** 100%

**Rapid charging and opportunity charging ensure continuous availability of vehicles.**

Li-Ion powered forklifts are always available. They allow for fast full charging or boost charging (100 % charge in 2 hours). They are maintenance free and do not require a battery change when used for multi-shift operations.

### Li-Ion Battery Pack specification

|                |      |              |
|----------------|------|--------------|
| Type           |      | CBD20-AC1-LI |
| Li-Ion battery | V/Ah | 24/125       |

# A Series Pallet Truck With High Lift

The A series pallet with high lift is a pedestrian pallet truck which can also be used for order picking and light stacking operations. In addition to the support arm lift the load can be raised to an overall height of 675 mm via a simplex mast contained in the battery compartment. This height adjustment is really appreciated when order picking, restocking shelves in retail stores or assembly line activities in manufacturing industries.

**Power/  
Manoeuvrable/  
Compact**



## Performance

- / The arms have high lifting function, and there is better trafficability.
- / With the design of handling by the double pallets (upper and lower pallets), it cannot only meet the light stacking work demand, but also can improve the material handling efficiency.
- / The powerful lift & AC traction motors supply the performance needed to achieve a high level of productivity.
- / With the latest CURTIS control system, control is precise and stable, efficiency is higher.
- / With CANBUS bus structure, the communication of the truck is faster and reliable.
- / The truck has the regenerative braking, and has anti-sliding protection at the ramp.

## Stability

- / Integrated mast matched to chassis width.
- / High resistance fork carriage and load arms made of robust pressed steel.

## Comfort

- / All commands integrated to the tiller, the function buttons can be operated in comfortable way.
- / For safe use in confined areas, tiller operates in vertical position via crawl speed button.
- / Additional buttons located on the truck side allows the operator for example to pick goods at a comfortable height.
- / Long tiller arm reduces steering effort to maximise manoeuvrability.

## Maintenance

- / No carbon brushes – maintenance-free traction motor.
- / Extensive instrument display allow the operator to monitor the situation at a glance.
- / Easy access to all parts with one-piece back panel, maintenance is very convenient.



The truck benefits from a long tiller with a low mounting point ensuring a large safety clearance between operator & chassis



Automatic picking functions (OPT) enable all kind of loads to be lifted or lower quickly and without fatigue



Easy battery charging - suitable for any convenient electric outlet



The support arm lift capacity is 2000 kg while the mast lift capacity is 800 kg

## Reliability

- / With five-supporting-point and low gravity center design, a rugged construction makes the pallet truck that can be relied on.
- / With the non-contact proximity switch, such switch has long service life and can operate reliably.
- / The lifting electric limit switch is provided, the hydraulic power unit will not have overflow. It is more energy-saving, and the power unit motor can also be protected.
- / The sturdy mast and the durable carriage are made of high-grade rolled steel contributing to a long truck life as well as fast, easy and safe load handling.
- / The stamped and formed forks have higher strength and shock resistance.

## Safety

- / The release braking, reverse braking and emergency braking to ensure the truck running safety.
- / No roll-back when starting on a slope.
- / The truck has the lowering intelligent protection function. When the forks are less than 150mm away from the ground, the side lowering button is ineffective.
- / With the emergency reverse button at the head of the handle, when the truck runs back and there is emergency, it can effectively prevent the driver from injury.

## Standard specification

- / AC traction motor
- / CURTIS controller
- / Additional buttons for lifting/lowering the forks on chassis side
- / Multi-functional instrument
- / Polyurethane dual load wheels
- / Fork length: 1150mm
- / Distance between fork-arms: 560mm
- / Initial lifting: 125mm
- / CAN bus multi-functional handle
- / Lifting electric limit
- / Horn
- / Key switch
- / Crawl speed function
- / Upright-tiller creep speed running
- / Auto reverse safety switch

## Options

- / Load backrest
- / Automatic picking function
- / Password lock
- / Cold storage

